


GS 14 / 24N / 24T



GS 14 / 24

Outline Drawings

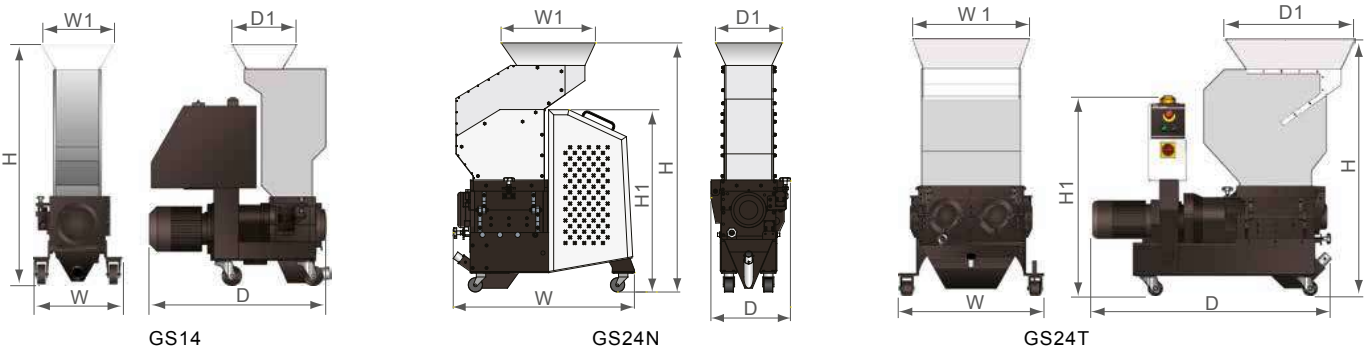

GS14/24N/24T Specifications

Model	GS1411	GS1417	GS2417N	GS2427N	GS2436N	GS2427T	GS2436T	GS2446T
Motore (kW, 50/60Hz)	0.37/0.45	0.37/0.45	0.75/0.86	0.75/0.86	1.5/1.75	1.5x2/1.75x2	2.2x2/2.55x2	2.2x2/2.55x2
Giri rotore (rpm, 50/60Hz)	26/32	26/32	27/33	27/33	27/33	27/33	27/33	27/33
Tipo acciaio lame	SKD11	SKD11	SKD11	SKD11	SKD11	SKD11	SKD11	SKD11
Quantita lame di taglio	1	2	1	2	3	5	7	9
Quantita denti incisori	2	3	2	3	4	/	/	/
Quantita lame di taglio	/	/	/	/	/	5	7	9
Quantita denti incisori	/	/	/	/	/	2	2	2
Ingresso camera (mm)	140 x 110	140 x 175	240 x 175	240 x 270	240 x 365	505 x 270	505 x 365	505 x 460
Produzione indicativa (kg/hr, 50/60HZ)	2	3	3.5	6/6.5	8.5/9	15	20	25
Decibel dB(A)	60~68	60~68	80~85	80~85	80~85	80~85	80~85	80~85
30-sec Tempo di ritardo BC	/	/	○	○	○	○	○	○
BC a bordo granulatore	/	/	○	○	○	○	○	○
DS Separatore di polvere	/	/	○	○	○	○	○	○
Sensore di livello	/	/	○	○	○	○	○	○
Valvola proporzionale	/	/	/	○	○	○	○	○
Cassetto di raccolta	/	/	/	/	/	○	○	○
Dimensioni								
H (mm)	1080	1280	1330	1330	1330	1360	1360	1360
H1 (mm)	/	/	975	975	975	1060	1060	1060
W (mm)	290	290	770	870	970	773	773	773
W1 (mm)	235	235	310	410	500	620	620	620
D (mm)	740	785	425	425	425	1160	1269	1365
D1(mm)	210	266	350	350	350	522	688	785
Weight (kg)	83	92	252	279	331	480	530	560